

FIRED EARTH

by

westex.

FLOORING EXCELLENCE



LOXLEY
LOOP

WISKE
VELVET

HEBBLE
TWIST

TECHNICAL DETAILS



FIRED EARTH

by

westex.

FLOORING EXCELLENCE

FIRED EARTH COLLECTION



The Fired Earth Collection presents three premium Westex carpet styles all available in a choice of 18 natural shades colour-matched to popular Fired Earth paint colours.

Available in 5 widths:

1.00m, 3.66m (12ft), 4.00m, 4.57m (15ft) & 5.00m

Method of Manufacture:

Varies according to design Style - see details right


Pile Material:

Varies according to design Style - see details right

Colour Palette:

18 Colours

3 DESIGN STYLES

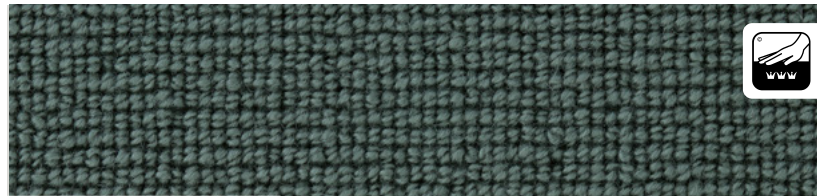

LOXLEY LOOP

Method of Manufacture:

3 Fold Loop Pile, 5/32" Gauge

Pile Material: **100% Pure Wool**


Luxury Rating: **LC3**

End Use Classification: **Class 23 / 33**

Tuft Density*: **84,320 per m²**

Total Carpet Thickness*: **7.5mm**

Tog Rating*: **1.33 tog**

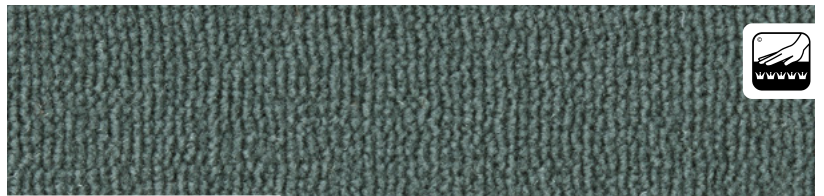

WISKE VELVET

Method of Manufacture:

2 Fold Tufted Cut Pile

Pile Material: **80% Wool 20% Nylon**


Luxury Rating: **LC5**

End Use Classification: **Class 23 / 32**

Tuft Density*: **136,400 per m²**

Total Carpet Thickness*: **12.5mm**

Tog Rating*: **1.92 tog**

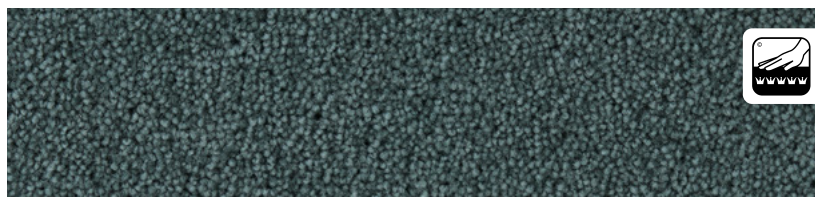

HEBBLE TWIST

Luxury Rating: **LC5**

End Use Classification: **Class 23 / 33**

Tuft Density*: **164,300 per m²**

Total Carpet Thickness*: **16.5mm**

Tog Rating*: **2.68 tog**

*+/- 10% commercial tolerance



Westex Carpets Limited.

Calder Bank Mills, Calder Bank Road, Dewsbury WF12 9QW, United Kingdom

Tel: +44 (0)1274 861334

Fax: +44 (0)1274 873266

westexflooring.com

info@westexflooring.com


westex.

FLOORING EXCELLENCE

FIRED EARTH COLLECTION

LOXLEY LOOP


18 COLOUR OPTIONS



Tempest




Goldfinch




Smoke Blue




China Clay



Dartmouth Green



White Ochre



Ultramarine Ashes




Oyster



Tundra




Canvas




Granite



Masilla



Garden Folly




Manna Ash



Modernist White



Malm



Pearl Ashes



Flake White



Colour: Dartmouth Green



Westex Carpets Limited.
Calder Bank Mills, Calder Bank Road, Dewsbury WF12 9QW, United Kingdom
Tel: +44 (0)1274 861334 Fax: +44 (0)1274 873266
westexflooring.com info@westexflooring.com


westex.

FLOORING EXCELLENCE


FIRED EARTH COLLECTION

WISKE VELVET

18 COLOUR OPTIONS




Tempest




Goldfinch



Smoke Blue




China Clay




Dartmouth Green



White Ochre



Ultramarine Ashes




Oyster



Tundra




Canvas




Granite



Masilla




Garden Folly




Manna Ash



Modernist White



Malm



Pearl Ashes



Flake White



Colour: Malm



Westex Carpets Limited.
Calder Bank Mills, Calder Bank Road, Dewsbury WF12 9QW, United Kingdom
Tel: +44 (0)1274 861334 Fax: +44 (0)1274 873266
westexflooring.com info@westexflooring.com


westex.

FLOORING EXCELLENCE


FIRED EARTH COLLECTION

HEBBLE TWIST


18 COLOUR OPTIONS




Tempest




Goldfinch




Smoke Blue




China Clay



Dartmouth Green




White Ochre



Ultramarine Ashes




Oyster




Tundra




Canvas




Granite




Masilla




Garden Folly




Manna Ash




Modernist White



Malm



Pearl Ashes



Flake White



Colour: Malm
















Westex Carpets Limited.
Calder Bank Mills, Calder Bank Road, Dewsbury WF12 9QW, United Kingdom
Tel: +44 (0)1274 861334 Fax: +44 (0)1274 873266
westexflooring.com info@westexflooring.com

westex.

FLOORING EXCELLENCE














Technical Specification

Luxury Rating	BS EN 1307:2014	LC3	
End Use Classification	BS EN 1307:2014	Class 23 Heavy Domestic Use Class 33 Heavy Commercial Use	
Hexapod 4000	BS EN 1307:2014	4.5	
Hexapod 12000	BS EN 1307:2014	4.0	
Roll Widths*		Available in 5 sizes: • 1.00m • 3.66m (12ft) • 4.00m • 4.57m (15ft) • 5.00m	
Roll Length		Customisable	
Method of Manufacture		3 Fold Loop Pile, 5/32" Gauge	
Tuft Density*	ISO 1763	84,320 per m ²	
Pile Material		100% Wool	
Pile Height above Backing*		5.5mm	
Total Carpet Thickness*		7.5mm	
Primary Backing		Polypropylene	
Flammability	BS4790 Hot Nut Test	Low Radius of Char	
Reaction to Fire	BS EN 13501	Class C _{fl-s1}	
Delamination	BS ISO 11857	Pass Minimum 15.00 (N)	
Thermal resistance	BS4745	1.33 tog	
Dimensional Stability	ISO 2551-1981 (2010)	Pass Pass if shrinkage is equal to or less than 1.2% and extension less than or equal to 0.5%	
Colour Fastness: Light Colour Fastness: Shampooing Colour Fastness: Rubbing	BS EN ISO -B02 BS ISO -18168 BS EN ISO -X12	4-5 4 4	
Electrical Resistance	ISO 10965:2011	Pass Does not exceed 10Ω	
Sound Absorption		Class C with Underlay	
Underfloor heating system		Suitable to a max. 27°C Please check with manufacturers guidelines	
Warranty		6 Years	
IMO Certified	IMO FTP Code 2010 Part 2 & Part 5	Pass Available on request	
CE Mark	EN 14041		

*Commercial Tolerance +/- 10%



Technical Specification

Luxury Rating	BS EN 1307:2014	LC5	
End Use Classification	BS EN 1307:2014	Class 23 Heavy Domestic Use Class 33 Heavy Commercial Use	
Hexapod 4000	BS EN 1307:2014	3.5	
Hexapod 12000	BS EN 1307:2014	2.5	
Roll Widths*		Available in 5 sizes: • 1.00m • 3.66m (12ft) • 4.00m • 4.57m (15ft) • 5.00m	
Roll Length		Customisable	
Method of Manufacture		2 Fold Tufted Cut Pile, 1/8" Gauge	
Tuft Density*	ISO 1763	136,400 per m ²	
Pile Material		80% Wool 20% Nylon	
Pile Height above Backing*		10.5mm	
Total Carpet Thickness*		12.5mm	
Primary Backing		Polypropylene	
Flammability	BS4790 Hot Nut Test	Low Radius of Char	
Reaction to Fire	BS EN 13501	Class C _{fl-s1}	
Delamination	BS ISO 11857	Pass Minimum 15.00 (N)	
Thermal resistance	BS4745	1.92 tog	
Dimensional Stability	ISO 2551-1981 (2010)	Pass Pass if shrinkage is equal to or less than 1.2% and extension less than or equal to 0.5%	
Colour Fastness: Light Colour Fastness: Shampooing Colour Fastness: Rubbing	BS EN ISO -B02 BS ISO -18168 BS EN ISO -X12	4-5 4 4	
Electrical Resistance	ISO 10965:2011	Pass Does not exceed 10Ω	
Sound Absorption		Class C with Underlay	
Underfloor heating system		Suitable to a max. 27°C Please check with manufacturers guidelines	
Warranty		6 Years	
IMO Certified	IMO FTP Code 2010 Part 2 & Part 5	Pass Available on request	
CE Mark	EN 14041		

*Commercial Tolerance +/- 10%
















Westex Carpets Limited.
Calder Bank Mills, Calder Bank Road, Dewsbury WF12 9QW, United Kingdom
Tel: +44 (0)1274 861334 Fax: +44 (0)1274 873266
westexflooring.com info@westexflooring.com



FLOORING EXCELLENCE

Technical Specification

Luxury Rating	BS EN 1307:2014	LC5	
End Use Classification	BS EN 1307:2014	Class 23 Heavy Domestic Use Class 33 Heavy Commercial Use	
Hexapod 4000	BS EN 1307:2014	4.0	
Hexapod 12000	BS EN 1307:2014	3.5	
Roll Widths*		Available in 5 sizes: • 1.00m • 3.66m (12ft) • 4.00m • 4.57m (15ft) • 5.00m	
Roll Length		Customisable	
Method of Manufacture		2 Fold Tufted Cut Pile	
Tuft Density*	ISO 1763	220,8750 per m ²	
Pile Material		80% Wool 20% Nylon	
Pile Height above Backing*		7.5mm	
Total Carpet Thickness*		9.0mm	
Primary Backing		Polypropylene	
Flammability	BS4790 Hot Nut Test	Low Radius of Char	
Reaction to Fire	BS EN 13501	Class C _{fl-s1}	
Delamination	BS ISO 11857	Pass Minimum 15.00 (N)	
Thermal resistance	BS4745	1.34 tog	
Dimensional Stability	ISO 2551-1981 (2010)	Pass Pass if shrinkage is equal to or less than 1.2% and extension less than or equal to 0.5%	
Colour Fastness: Light Colour Fastness: Shampooing Colour Fastness: Rubbing	BS EN ISO -B02 BS ISO -18168 BS EN ISO -X12	5 5 5	
Electrical Resistance	ISO 10965:2011	Pass Does not exceed 10Ω	
Sound Absorption		Class C with Underlay	
Underfloor heating system		Suitable to a max. 27°C Please check with manufacturers guidelines	
Warranty		6 Years	
IMO Certified	IMO FTP Code 2010 Part 2 & Part 5	Pass Available on request	
CE Mark	EN 14041		

*Commercial Tolerance +/- 10%



Westex Carpets Limited.
Calder Bank Mills, Calder Bank Road, Dewsbury WF12 9QW, United Kingdom
Tel: +44 (0)1274 861334 Fax: +44 (0)1274 873266
westexflooring.com info@westexflooring.com

westex.

FLOORING EXCELLENCE

THE UNIQUE ADVANTAGES OF A WESTEX CARPET



Allergy Guard

Allergy Guard protects against pests, bacteria and allergens whilst Fresh Guard inhibits mould and neutralises pet odours. All Westex Carpets have an anti-dust mite treatment applied to protect against house dust mites, mould fungi and bacteria and their allergens, fresh guard is also part of the construction of this treatment.

The active ingredient in the treatment does not allow the debris (human skin, hair etc.) to decay into the food that the dust mites thrive upon, thus there is no environment for them to exist or thrive in. This will also inhibit the bacteria and mould development. Thorough vacuuming will then maintain the cleanliness of the carpet.



Fresh Guard

This treatment has been subjected to the full rigours of scientific testing, both toxicologically and ecologically, to establish that there is no harm to human or pet health, or the environment. It is tested to OECD 404 and 406 to qualify as no irritation or sensitisation.

These treatments combine with the wool fibre on a permanent basis and will last the life time of the carpet.



Stain-Resist

All Westex Carpets have a Stain Resist treatment applied. Stain Resist is not a stain blocker. Stain Resist slows the stain penetration down, giving time to get the carpet cleaned. The stain resist formula bonds with the fibre to provide protection against dirt and damp, therefore making caring for the carpet easier.

This treatment prevents stains from penetrating the fiber and they temporarily remain locked on the surface so they can easily be removed. The breathable properties of the fibre are not affected.

Shampooing and professional carpet cleaning products cannot break the bonds between the active chemical and fibre. The performance of the Stain Resist will last 5 years, subject to normal, reasonable use.

Stain Resist is free from CFCs and is dermatologically tested. The Stain Resist polymers show no toxicity even at the highest applied levels and no bioavailability, metabolism or hydrolysis.



Moth Guard

All Westex carpets have a mothproofing treatment applied. Mothproofing protects your carpet against the attack of both moths and other wool eating insects. The active ingredient in the moth-proof makes the keratin (a protein found in wool) that moths, bugs and other insects thrive upon, indigestible. They literally starve as their digestive systems are unable to convert the keratin they have eaten into usable food.

The moth-proof combines with the wool fibre on a permanent basis and will last the life time of the carpet.

Westex's award winning moth-proof process has had scientific testing, both toxicologically and ecologically, to establish that there is no harm to human or pet health with no effluent waste.



Westex Carpets Limited.
Calder Bank Mills, Calder Bank Road, Dewsbury WF12 9QW, United Kingdom
Tel: +44 (0)1274 861334 Fax: +44 (0)1274 873266
westexflooring.com info@westexflooring.com

westex.
FLOORING EXCELLENCE