

TECHNICAL DETAILS

westex.

FLOORING EXCELLENCE

WOOL LOOP COLLECTION
KIRKMOND





Our versatile 100% wool carpet made from fine 4-fold yarn - available in a palette of contemporary natural shades.

Available in 5 widths:
1.00m, 3.66m (12ft), 4.00m, 4.57m (15ft) & 5.00m


Method of Manufacture:
4 Fold Loop Pile

Pile Material:
100% Wool

Colour Palette:
9 Natural Shades

This product is produced using natural undyed yarn and this may result in colour variation.

DESIGN STYLE

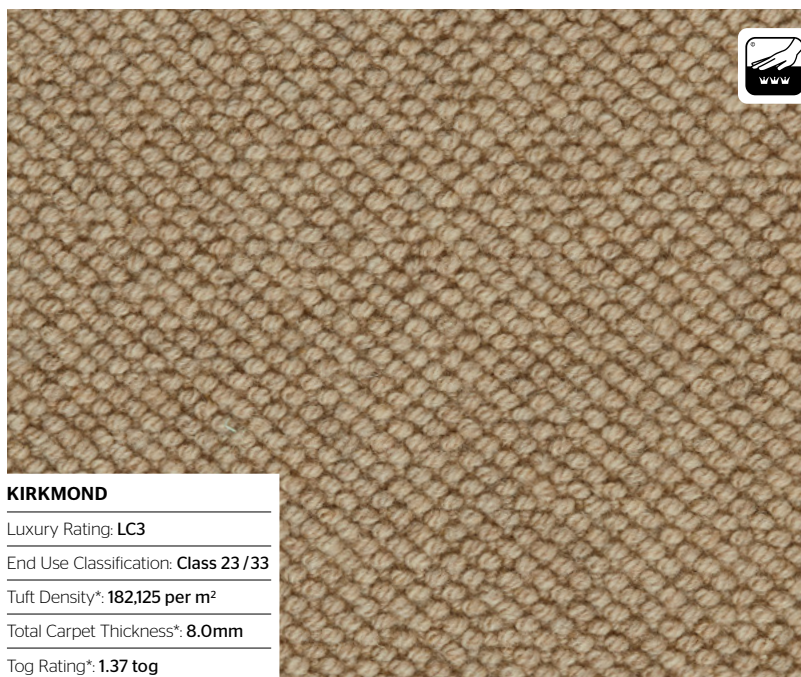

KIRKMOND
 Luxury Rating: **LC3**
 End Use Classification: **Class 23 / 33**
 Tuft Density*: **182,125 per m²**
 Total Carpet Thickness*: **8.0mm**
 Tog Rating*: **1.37 tog**
 *+/- 10% commercial tolerance



Westex Carpets Limited.
 Calder Bank Mills, Calder Bank Road, Dewsbury WF12 9QW, United Kingdom
 Tel: +44 (0)1274 861334 Fax: +44 (0)1274 873266
 westexflooring.com info@westexflooring.com

westex.
 FLOORING EXCELLENCE

WOOL LOOP COLLECTION

KIRKMOND

9 SINGLE COLOUR OPTIONS



Iron



Gabbro



Nickel




Fog



Greige




Rye



Caraway



Halite



Basmati

















Westex Carpets Limited.
Calder Bank Mills, Calder Bank Road, Dewsbury WF12 9QW, United Kingdom
Tel: +44 (0)1274 861334 Fax: +44 (0)1274 873266
westexflooring.com info@westexflooring.com

westex.

FLOORING EXCELLENCE

Technical Specification

Luxury Rating	BS EN 1307:2014	LC3	
End Use Classification	BS EN 1307:2014	Class 23 Heavy Domestic Use Class 33 Heavy Commercial Use	 
Hexapod 4000	BS EN 1307:2014	4.0	
Hexapod 12000	BS EN 1307:2014	3.5	
Roll Widths*		Available in 5 sizes: • 1.00m • 3.66m (12ft) • 4.00m • 4.57m (15ft) • 5.00m	
Roll Length		Customisable	
Method of Manufacture		4 Fold Loop Pile, 1/5" Gauge	
Tuft Density*	ISO 1763	182,125 per m ²	
Pile Material		100% Wool	
Pile Height above Backing*		5.5mm	
Total Carpet Thickness*		8.0mm	
Primary Backing		Polypropylene	
Flammability	BS4790 Hot Nut Test	Low Radius of Char	
Reaction to Fire	BS EN 13501	Class Cfl-s1	
Delamination	BS ISO 11857	Pass Minimum 15.00 (N)	
Thermal resistance	BS4745	1.37 tog	
Dimensional Stability	ISO 2551-1981 (2010)	Pass Pass if shrinkage is equal to or less than 1.2% and extension less than or equal to 0.5%	
Colour Fastness: Light Colour Fastness: Shampooing Colour Fastness: Rubbing	BS EN ISO -B02 BS ISO -18168 BS EN ISO -X12	4-5 4 4	
Electrical Resistance	ISO 10965:2011	Pass Does not exceed 10Ω	
Sound Absorption		45-51 dB with underlay	
Underfloor heating system		Suitable to a max. 27°C Please check with manufacturers guidelines	
Warranty		6 Years	
IMO Certified	IMO FTP Code 2010 Part 2 & Part 5	Not Available	
UKCA Mark	EN 14041		

*Commercial Tolerance +/- 10%



Westex Carpets Limited.
Calder Bank Mills, Calder Bank Road, Dewsbury WF12 9QW, United Kingdom
Tel: +44 (0)1274 861334 Fax: +44 (0)1274 873266
westexflooring.com info@westexflooring.com

westex.

FLOORING EXCELLENCE

THE UNIQUE ADVANTAGES OF A WESTEX CARPET



Allergy Guard

Allergy Guard protects against pests, bacteria and allergens whilst Fresh Guard inhibits mould and neutralises pet odours. All Westex Carpets have an anti-dust mite treatment applied to protect against house dust mites, mould fungi and bacteria and their allergens, fresh guard is also part of the construction of this treatment.

The active ingredient in the treatment does not allow the debris (human skin, hair etc.) to decay into the food that the dust mites thrive upon, thus there is no environment for them to exist or thrive in. This will also inhibit the bacteria and mould development. Thorough vacuuming will then maintain the cleanliness of the carpet.



Fresh Guard

This treatment has been subjected to the full rigours of scientific testing, both toxicologically and ecologically, to establish that there is no harm to human or pet health, or the environment. It is tested to OECD 404 and 406 to qualify as no irritation or sensitisation.

These treatments combine with the wool fibre on a permanent basis and will last the life time of the carpet.



Stain-Resist

All Westex Carpets have a Stain Resist treatment applied. Stain Resist is not a stain blocker. Stain Resist slows the stain penetration down, giving time to get the carpet cleaned. The stain resist formula bonds with the fibre to provide protection against dirt and damp, therefore making caring for the carpet easier.

This treatment prevents stains from penetrating the fiber and they temporarily remain locked on the surface so they can easily be removed. The breathable properties of the fibre are not affected.

Shampooing and professional carpet cleaning products cannot break the bonds between the active chemical and fibre. The performance of the Stain Resist will last 5 years, subject to normal, reasonable use.

Stain Resist is free from CFCs and is dermatologically tested. The Stain Resist polymers show no toxicity even at the highest applied levels and no bioavailability, metabolism or hydrolysis.



Moth Guard

All Westex carpets have a mothproofing treatment applied. Mothproofing protects your carpet against the attack of both moths and other wool eating insects. The active ingredient in the moth-proof makes the keratin (a protein found in wool) that moths, bugs and other insects thrive upon, indigestible. They literally starve as their digestive systems are unable to convert the keratin they have eaten into usable food.

The moth-proof combines with the wool fibre on a permanent basis and will last the life time of the carpet.

Westex's award winning moth-proof process has had scientific testing, both toxicologically and ecologically, to establish that there is no harm to human or pet health with no effluent waste.



Westex Carpets Limited.
Calder Bank Mills, Calder Bank Road, Dewsbury WF12 9QW, United Kingdom
Tel: +44 (0)1274 861334 Fax: +44 (0)1274 873266
westexflooring.com info@westexflooring.com

westex.
FLOORING EXCELLENCE